




GARIS®

**BALL BEARING
SLIDE SERIES**

Uniform structure,
stable force bearing

GARIS Ball Bearing Slide Series can cater to all kinds of different cabinet board, whether it is wood board, or special plate. GARIS Ball Bearing Slide is stable and durable, giving full play to its product functions in different material conditions and usage scenarios.

BALL BEARING SLIDE SERIES

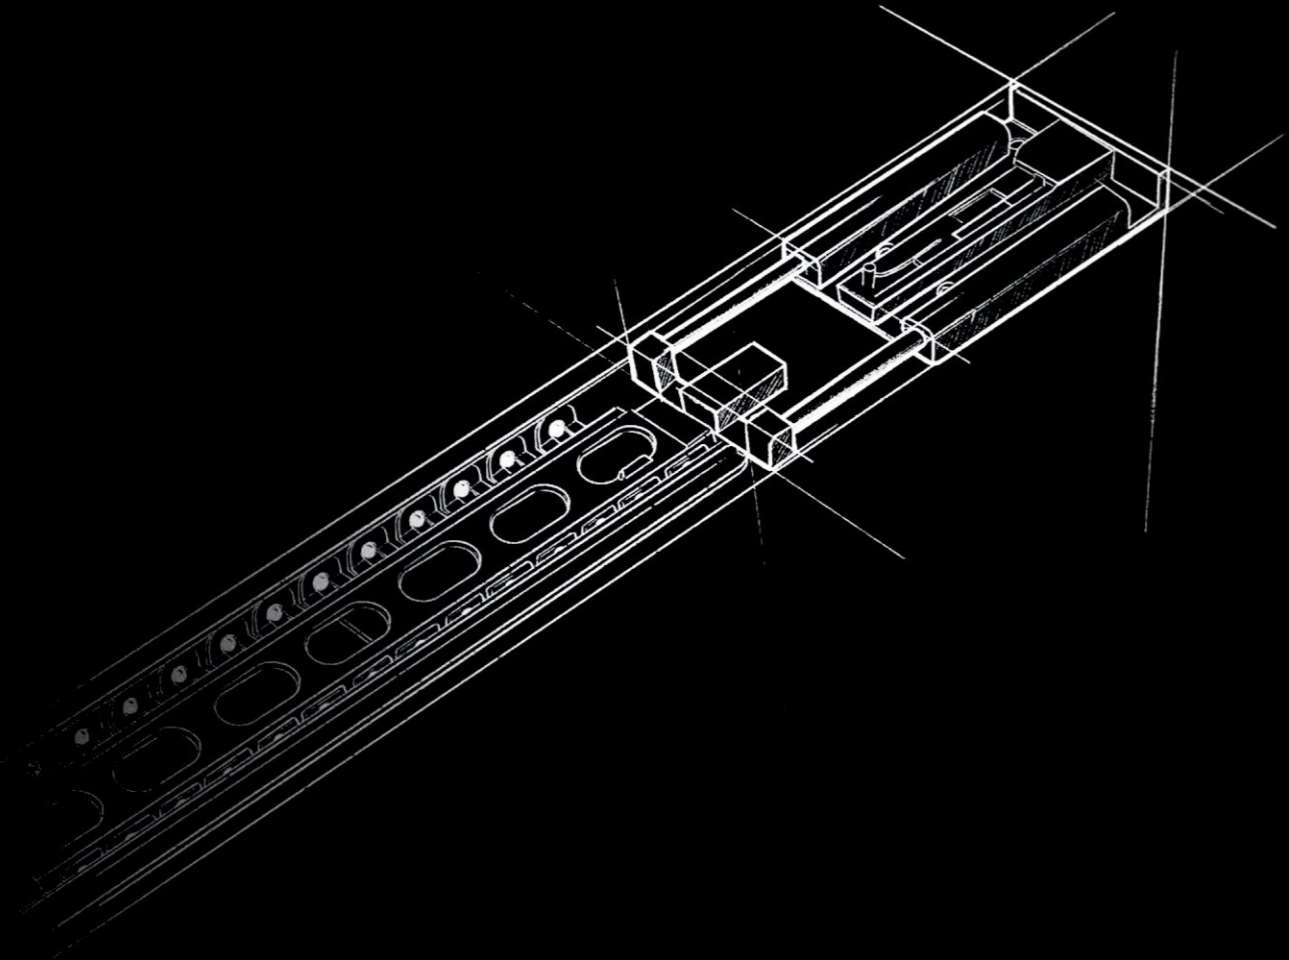

Precision steel ball

Double row precision steel balls bearings for smooth performance,
Noise reduction,
Deliver a comfortable pulling experience you' d never had.



45mm soft-closing distance,
Not afraid of impact,
avoiding collision,
Reduce noise for you.



40KG load-bearing capacity,
Great reliable and stable,
Free to use,
More pragmatic.



Double row of steel balls,
More steel balls,
Run smoothly.



One press to remove,
Built-in dis-assembly tool,
Easy pressing,
Remove quickly.

Ball Bearing Slide Series

Full Extension Ball Bearing Slide



Describe


Material: Cold roller steel;
Material thickness: 1.0x1.0x1.2mm;
Finish: zinc galvanizing, electrophoresis black;
Load-bearing capacity limit: 40KG (Nominal length: 450mm);
Service life: 50000 times;
Size range: 200-600mm;
Installation: Cabinet side installation.




Product information

Nominal length	Electrophoresis black	Zinc blue plated	A	B	C	D	E	F	G	L	Set/Box
250	4503-10G	4503-10B	250	64					169	250	15SET
300	4503-12G	4503-12B	300	64	96			96	128	300	15SET
350	4503-14G	4503-14B	350	64	96			128	128	350	15SET
400	4503-16G	4503-16B	400	64	96	64		128	192	400	15SET
450	4503-18G	4503-18B	450	64	96	128		160	192	450	15SET
500	4503-20G	4503-20B	500	64	96	128	64	192	224	500	15SET
550	4503-22G	4503-22B	550	64	96	128	64	224	224	550	15SET
600	4503-24G	4503-24B	600	64	96	128	128	224	288	600	15SET

Slide sectional drawing

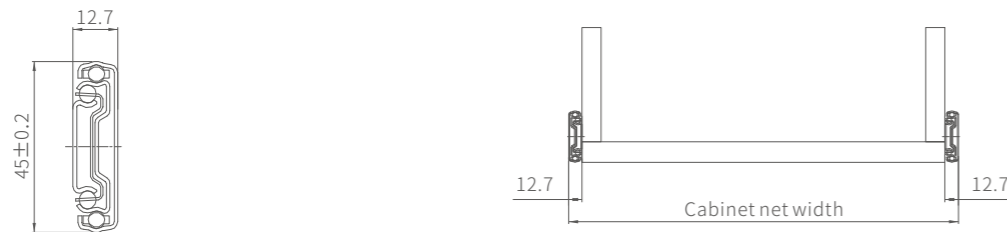

Slide Mounting Holes Size

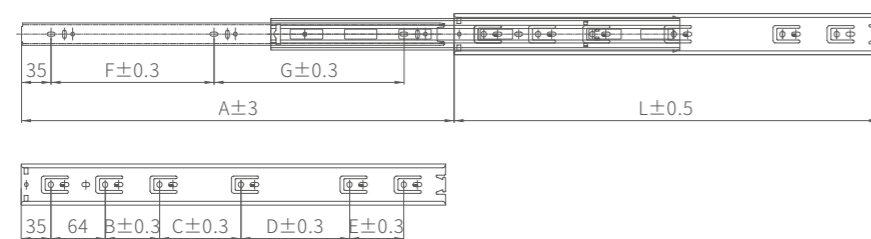

Regular - three-section steel ball damping slide

BALL BEARING SLIDE SERIES



Describe


Material: Cold roller steel;
Material thickness: 1.0x1.0x1.2mm;
Finish: zinc galvanizing, electrophoresis black;
Load-bearing capacity limit: 40KG (Nominal length: 450mm);
Service life: 50000 times;
Size range: 200-600mm;
Special function: stable soft closing, up to 45mm;
Damper with adjusting error correction;
Installation: Cabinet side installation;




Product information

Nominal length	Electrophoresis black	Zinc blue plated	A	B	C	D	E	F	G	L	Set/Box
250	4501-10G	4501-10B	250						132	250	15SET
300	4501-12G	4501-12B	300	64				96	86	300	15SET
350	4501-14G	4501-14B	350	64				128	104	350	15SET
400	4501-16G	4501-16B	400	64	64			128	133.5	400	15SET
450	4501-18G	4501-18B	450	64	96			160	149	450	15SET
500	4501-20G	4501-20B	500	64	96			192	167	500	15SET
550	4501-22G	4501-22B	550	64	96	128		224	185	550	15SET
600	4501-24G	4501-24B	600	64	96	128		224	235	600	15SET

Slide sectional drawing

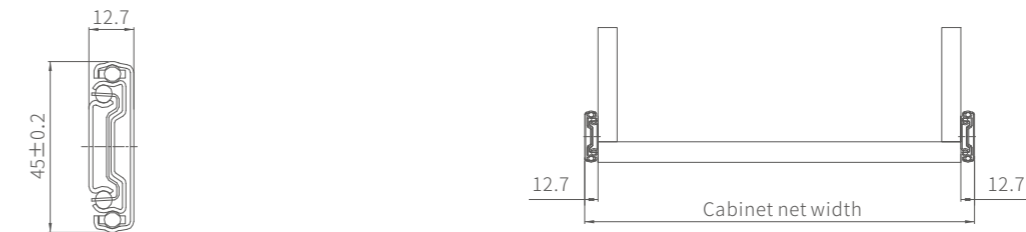

Slide Mounting Holes Size

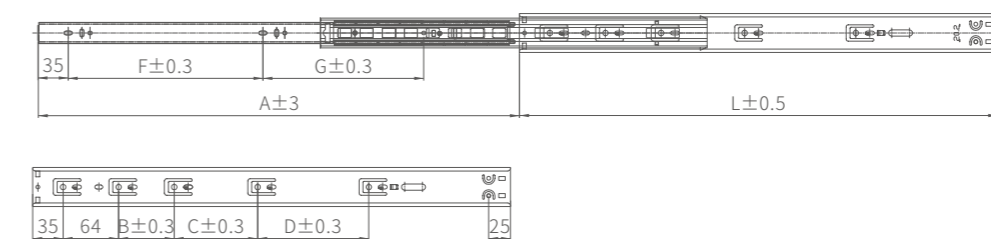

Ball Bearing Slide Series

Regular - three-section steel ball rebound slide



Describe

Material: Cold roller steel;
 Material thickness: 1.0x1.0x1.2mm;
 Finish: zinc galvanizing, electrophoresis black;
 Load-bearing capacity limit: 40KG (Nominal length: 450mm);
 Service life: 50000 times;
 Size range: 200-600mm;
 Special feature: Press to pop out;
 Installation: Cabinet side installation.



Product Details



Push open




Max load bearing


Product information

Nominal length	Electrophoresis black	Zinc blue plated	A	B	C	D	E	F	G	L	Set/Box
250	4504-10G	4504-10B	250						164	250	15SET
300	4504-12G	4504-12B	300	64				96	118	300	15SET
350	4504-14G	4504-14B	350	64				128	136	350	15SET
400	4504-16G	4504-16B	400	64	96			128	186	400	15SET
450	4504-18G	4504-18B	450	64	96			160	204	450	15SET
500	4504-20G	4504-20B	500	64	96			192	224	500	15SET
550	4504-22G	4504-22B	550	64	96	128		224	240	550	15SET
600	4504-24G	4504-24B	600	64	96	128		224	290	600	15SET

Slide sectional drawing

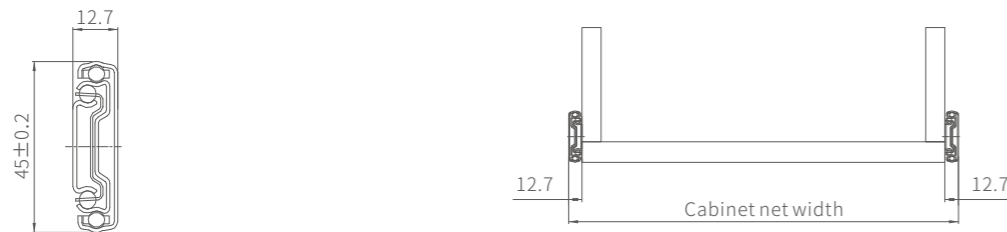

Slide Mounting Holes Size

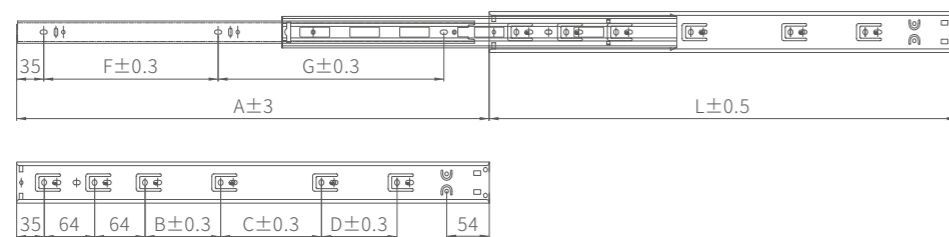

Thickened section - three-section steel ball ordinary slide

BALL BEARING SLIDE SERIES



Describe

Material: Cold roller steel;
 Material thickness: 1.2x1.2x1.5mm;
 Finish: zinc galvanizing, electrophoresis black;
 Load-bearing capacity limit: 40KG (Nominal length: 450mm);
 Service life: 50000 times;
 Size range: 200-600mm;
 Installation: Cabinet side installation.



Product Details




Max load bearing


Product information

Nominal length	Electrophoresis black	Zinc blue plated	A	B	C	D	E	F	G	L	Set/Box
250	4513-10G	4513-10B	250	64					169	250	15SET
300	4513-12G	4513-12B	300	64	96			96	128	300	15SET
350	4513-14G	4513-14B	350	64	96			128	128	350	15SET
400	4513-16G	4513-16B	400	64	96	64		128	192	400	15SET
450	4513-18G	4513-18B	450	64	96	128		160	192	450	15SET
500	4513-20G	4513-20B	500	64	96	128	64	192	224	500	15SET
550	4513-22G	4513-22B	550	64	96	128	64	224	224	550	15SET
600	4513-24G	4513-24B	600	64	96	128	128	224	288	600	15SET

Slide sectional drawing

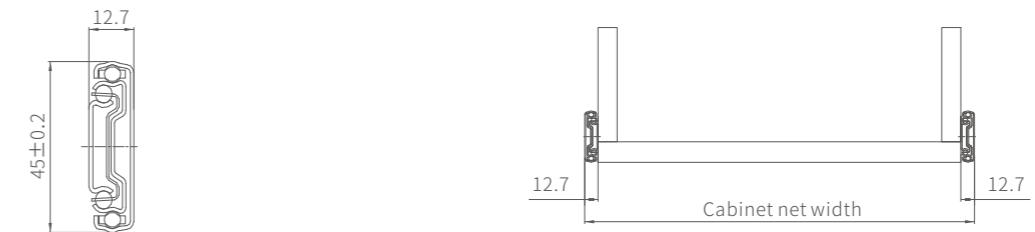

Slide Mounting Holes Size

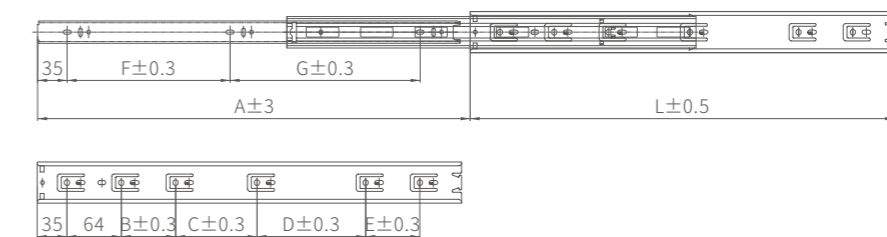

Ball Bearing Slide Series

Thickened section - three-section steel ball damping slide



Describe


Material: Cold roller steel;
 Material thickness: 1.2x1.2x1.5mm;
 Finish: zinc galvanizing, electrophoresis black;
 Load-bearing capacity limit: 40KG (Nominal length: 450mm);
 Service life: 50000 times;
 Size range: 200-600mm;
 Special function: stable soft closing, up to 45mm;
 Damper with adjusting error correction;
 Installation: Cabinet side installation;




Product information

Nominal length	Electrophoresis black	Zinc blue plated	A	B	C	D	E	F	G	L	Set/Box
250	4511-10G	4511-10B	250						132	250	15SET
300	4511-12G	4511-12B	300	64				96	86	300	15SET
350	4511-14G	4511-14B	350	64				128	104	350	15SET
400	4511-16G	4511-16B	400	64	64			128	133.5	400	15SET
450	4511-18G	4511-18B	450	64	96			160	149	450	15SET
500	4511-20G	4511-20B	500	64	96			192	167	500	15SET
550	4511-22G	4511-22B	550	64	96	128		224	185	550	15SET
600	4511-24G	4511-24B	600	64	96	128		224	235	600	15SET

Slide sectional drawing

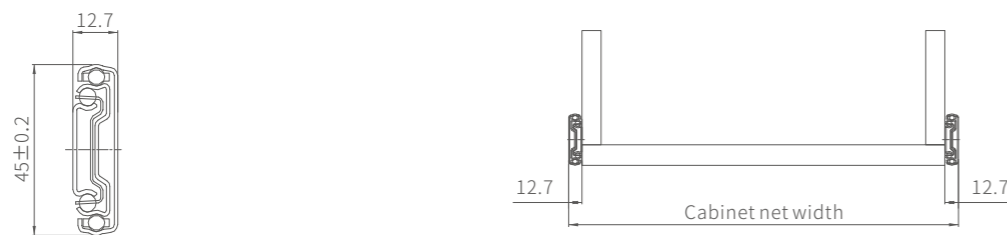

Slide Mounting Holes Size

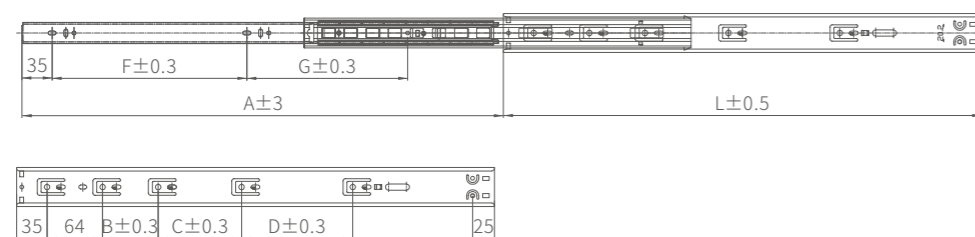


Thickened section - three-section steel ball rebound slide

BALL BEARING SLIDE SERIES



Describe


Material: Cold roller steel;
 Material thickness: 1.2x1.2x1.5mm;
 Finish: zinc galvanizing, electrophoresis black;
 Load-bearing capacity limit: 40KG (Nominal length: 450mm);
 Service life: 50000 times;
 Size range: 200-600mm;
 Special feature: Press to pop out;
 Installation: Cabinet side installation.



Product information

Nominal length	Electrophoresis black	Zinc blue plated	A	B	C	D	E	F	G	L	Set/Box
250	4514-10G	4514-10B	250						164	250	15SET
300	4514-12G	4514-12B	300	64				96	118	300	15SET
350	4514-14G	4514-14B	350	64				128	136	350	15SET
400	4514-16G	4514-16B	400	64	96			128	186	400	15SET
450	4514-18G	4514-18B	450	64	96			160	204	450	15SET
500	4514-20G	4514-20B	500	64	96			192	224	500	15SET
550	4514-22G	4514-22B	550	64	96	128		224	240	550	15SET
600	4514-24G	4514-24B	600	64	96	128		224	290	600	15SET

Slide sectional drawing

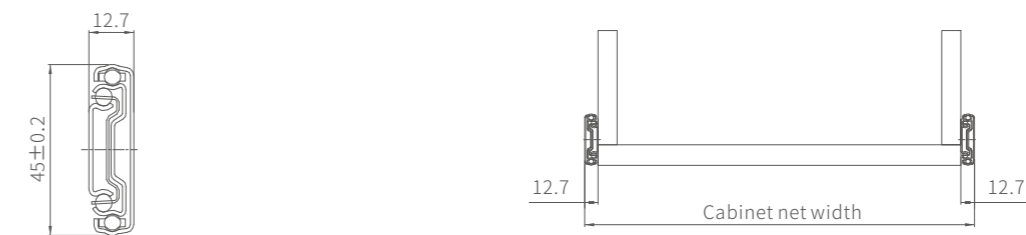

Slide Mounting Holes Size

